



No.	PARTS NAME	MATERIAL	FINISH	Q'TY
1				
2				
3				
4				
5				
6				
7				

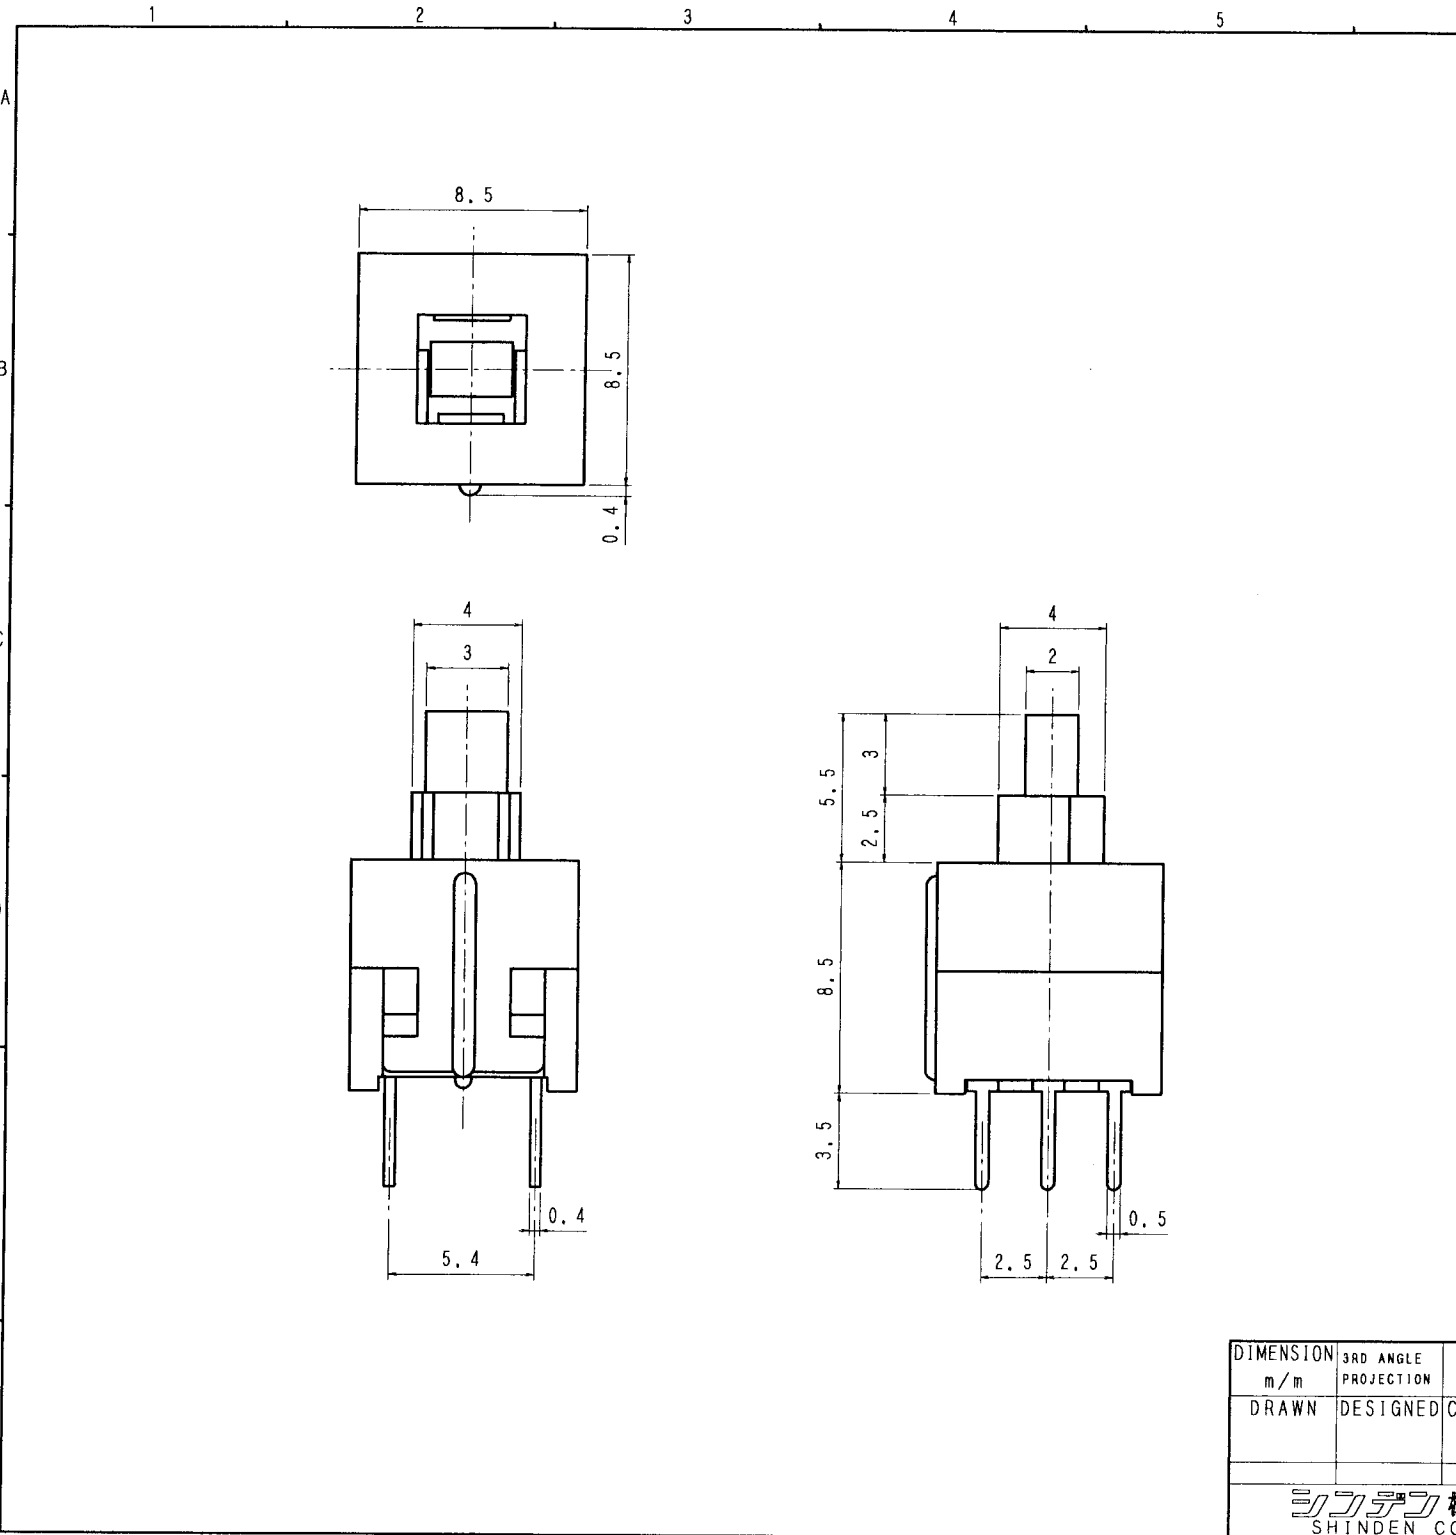

[SPECIFICATIONS]

- 1. RATING DC30V0.1A
- 2. CIRCUIT 2極双投



- 3. ELECTRICAL STRUCTURE
 - 3-1 CONTACT RESISTANCE LESS THAN 50mΩ
 - 3-2 INSULATION RESISTANCE MORE THAN 100MΩ. ON DC500V.
 - 3-3 DIELECTRIC STRENGTH AC500V. FOR 1MIN
 - 3-4 ENDURANCE 10000CY
- 4. MECHANICAL STRUCTURE
 - 4-1 OPERATION 1.8±0.5N (180±50g)
 - 4-2 TRAVEL FULL 2.5mm LOCK 1.5mm
- 5. RE: HOW TO SOLDER

SOLDERING SHOULD BE DONE WITH AN IRON OF THE TEMPERATURE BETWEEN 30W AND 40W, WITHIN 3 SECONDS,
- 6. LOADING

REGARDING TO THE LAMP LOADING AND THE LOADING OF POWER FACTOR RATIO UNDER 60%, BOTH LOADING SHOULD BE CONFIRMED WITH THE REAL EFFECTIVE LOADING,

DIMENSION	3RD ANGLE	SCALE	TOLERANCE UNLESS SPECIFIED										
m/m	PROJECTION	2:1	±0.3										
DRAWN	DESIGNED	CHECKED	APPROVED	TITLE PUSH SWITCH									
				DRAWING No. SDPJ-2281									