




PANEL CUT

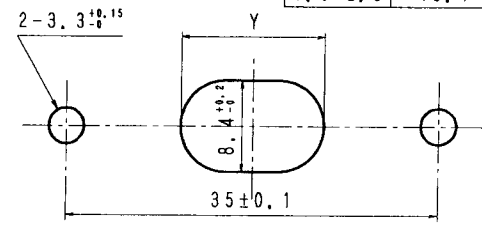

No.	PARTS NAME	MATERIAL	FINISH	Q'TY
1	LEVER	POLYACETAL	NATURAL	1
2	FRAME	CARBON STEEL	ZINC	1
3	CASE	PHENOLIC	NATURAL	1
4	TERMINAL	COPPER ALLOY	Ag PLATED	4
5	LED			1

[SPECIFICATIONS]


- RATING AC125V6A
- CIRCUIT SPST
- ELECTRICAL STRUCTURE
 - CONTACT RESISTANCE LESS THAN 20mΩ
 - INSULATION RESISTANCE MORE THAN 100MΩ. ON DC500V.
 - DIELECTRIC STRENGTH AC1500V. FOR 1MIN
 - ENDURANCE 10000CY
- MECHANICAL STRUCTURE
 - OPERATION 4~8. 8N (400~900g)
- RE: HOW TO SOLDER
SOLDERING SHOULD BE DONE WITH AN IRON OF THE TEMPERATURE BETWEEN 30W AND 40W, WITHIN 3 SECONDS,
- LOADING
REGARDING TO THE LAMP LOADING AND THE LOADING OF POWER FACTOR RATIO UNDER 60%, BOTH LOADING SHOULD BE CONFIRMED WITH THE REAL EFFECTIVE LOADING,

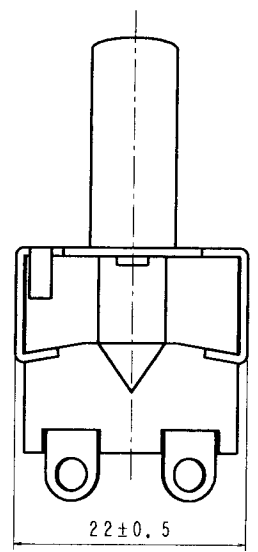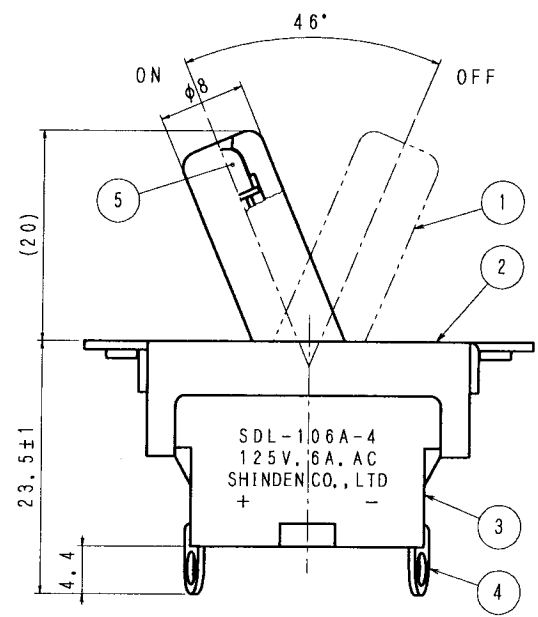

7. LED COLOR		LED VOLTAGE	
MARK	G	R	GREEN 2~2.8V. DC
LED COLOR	GREEN	RED	RED 1.67~1.9V. DC

LAMP CIRCUIT

LOAD CIRCUIT

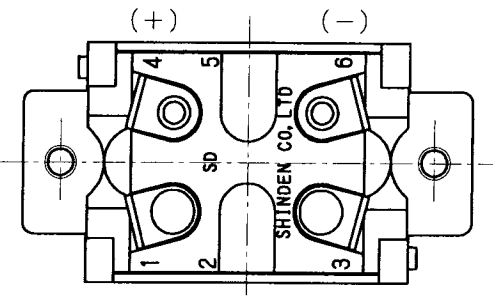

DIMENSION	3RD ANGLE	SCALE	TOLERANCE UNLESS SPECIFIED	TITLE									
m/m	PROJECTION	2:1	±0.3	LEVER SWITCH									
DRAWN	DESIGNED	CHECKED	APPROVED	DRAWING No.									
SHINDEN 株式会社 SHINDEN CO., LTD.				SDL-106A-4									