

No.	PARTS NAME	MATERIAL	FINISH	Q'TY
1	BUTTON	PBT	BLACK	1
2	FRAME	CARBON STEEL	ELECTROLYTIC ZINC-COATED	1
3	STEEL BALL	STEEL		2
4	COIL SPRING	PIANO WIRE		2
5	SPRING	PHOSPHOR BRONZE		3
6	CONTACT PLATE	COPPER	COPPER	3
7	BASE	PHENOLIC		1
8	TERMINAL	COPPER	Ag-PLATED	10

[SPECIFICATIONS]


- 1. RATING AC125V3A
- 2. CIRCUIT

BUTTON POSITION CIRCUIT	1	2	3	4
-1-	OFF	OFF	OFF	ON
-2-	OFF	ON	ON	ON
-3-	OFF	ON	ON	ON

- 3. ELECTRICAL STRUCTURE
 - 3-1 CONTACT RESISTANCE LESS THAN 20mΩ
 - 3-2 INSULATION RESISTANCE MORE THAN 100MΩ. ON DC500V.
 - 3-3 DIELECTRIC STRENGTH AC1000V. FOR 1MIN
 - 3-4 ENDURANCE 6000CY
- 4. MECHANICAL STRUCTURE
 - 4-1 OPERATION 1.96~12.74N
- 5. RE: HOW TO SOLDER

SOLDERING SHOULD BE DONE WITH AN IRON OF THE TEMPERATURE BETWEEN 30W AND 40W, WITHIN 3 SECONDS,
- 6. LOADING

REGARDING TO THE LAMP LOADING AND THE LOADING OF POWER FACTOR RATIO UNDER 60%, BOTH LOADING SHOULD BE CONFIRMED WITH THE REAL EFFECTIVE LOADING,
- 7. UL FILE No. E66008

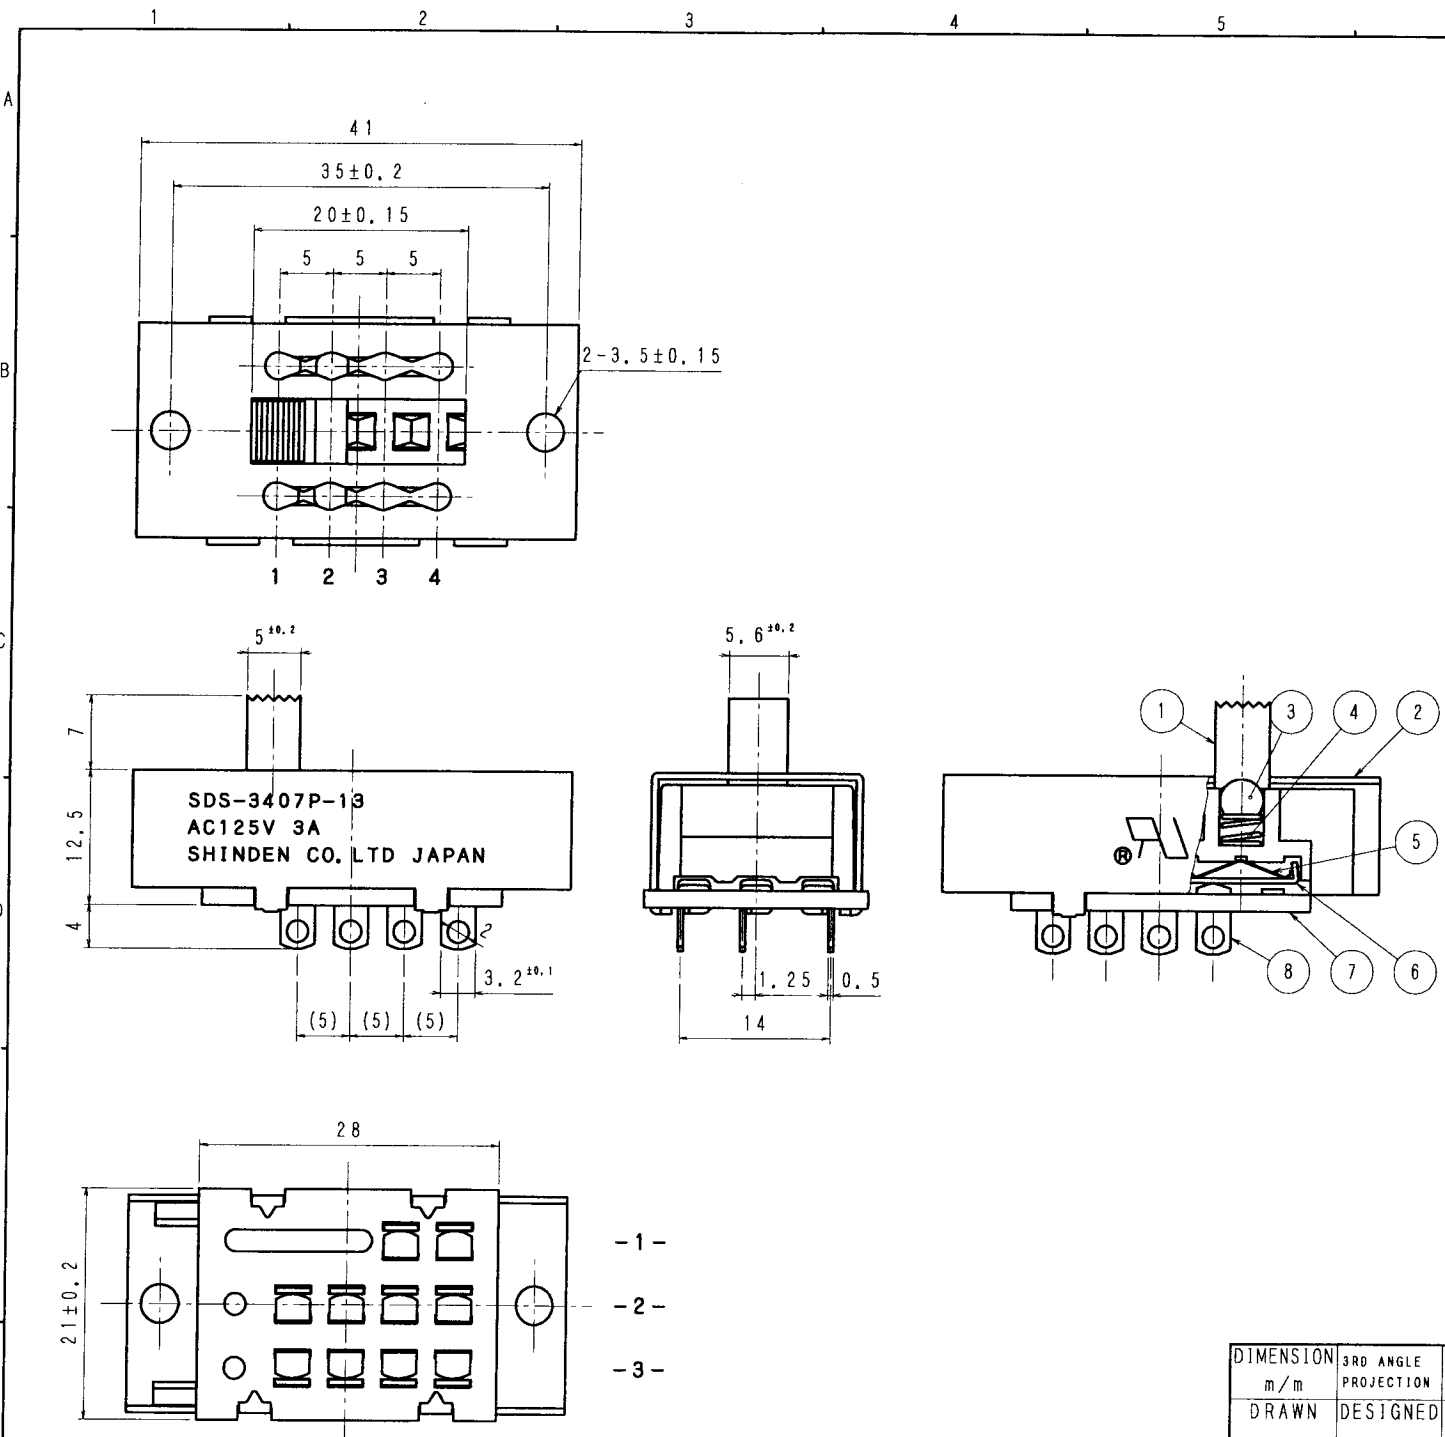

DIMENSION	3RD ANGLE	SCALE	TOLERANCE UNLESS SPECIFIED										
m/m	PROJECTION	2:1	±0.3										
DRAWN	DESIGNED	CHECKED	APPROVED	TITLE									
				SLIDE SWITCH									
				DRAWING No.									
				SDS-3407P-13BA442									
シンデン株式会社 SHINDEN CO., LTD.													